


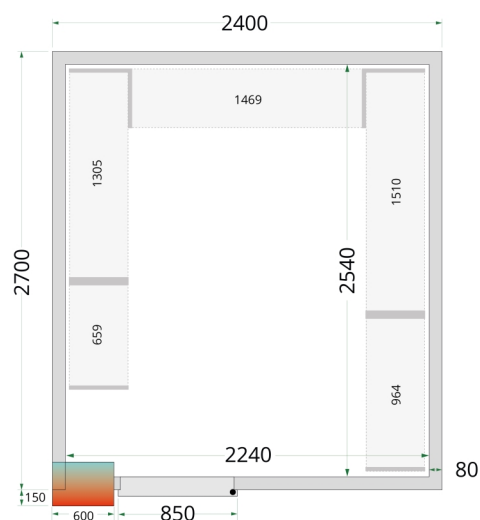

CRPF2427WD

Cold Room

Product Features

- 850 mm wide door
- Plug-In - ready after assembly
- Easy access to products
- Easy assembly
- Interlocking connection system
- Anti-slip floor in SS304 stainless steel
- 80 mm panel insulation
- Door position is fixed
- Shelves available as accessory
- Ramp available as accessory for easy access

Cold room with 850 mm wide door

Cold rooms are perfect as plug-in with quick and easy assemble. The cooling unit comes completely pre-mounted in a panel and does not require extra expert knowledge. This model has a 850 mm wide door for easy access.

The cold room can be used in both restaurants, delis, cafes etc. They are a great way to create optimal and efficient cooling space at a very affordable price. Cold rooms are a perfect and easy accessible way to store foods, dairy products and beverages.

The many different cold room sizes give a good fit in most conditions. Cold rooms are available as both cooler and freezer models. Shelves are optional. A ramp is also available as an option to provide easy access with lightweight trolleys and bakery racks (the cold room is not suitable for pallet jacks/pallet trucks).

Our range of cold rooms have a low energy consumption due to the effective polyurethane insulation in the panels combined with an energy efficient cooling system.

Not suitable for outdoor use.

Measures and Content

Insulation Density	kg/m ³	42
Wall Thickness	mm	80
Internal Volume	m ³	11.6
Temperature Range	°C	0 to +8
Climate Class		5
Gross / Net Weight	kg	666 / 636
Gross / Net Volume	l	

Design and Material

Door No & Type		1 hinged solid door
Max Load on Floor	kg/m ²	1500
Exterior Finish		White
Interior Finish		White
Interior Light		LED
Lock		Yes

Cooling and Functions

Type of Controller		Electronic
Type of Cooling		Ventilated
Type of Defrost		Automatic, hot gas
Refrigerant		R290
Refrigerant Charge	g	170
Thermometer		Yes

Power and Consumption


Energy Consumption	kWh/24h	23.4
Annual Energy Cons.	kWh/year	8541
Input Power	W	910
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	60

Dimensions

Internal Dimension (WxDxH)	mm	2240 x 2540 x 2040
External Dimension (WxDxH)	mm	2400 x 2700 x 2200
Packed Dimension (WxDxH)	mm	1600 x 2500 x 1300 mm
40ft Container Load	pcs	8



Strong handle



Shelf as accessory