


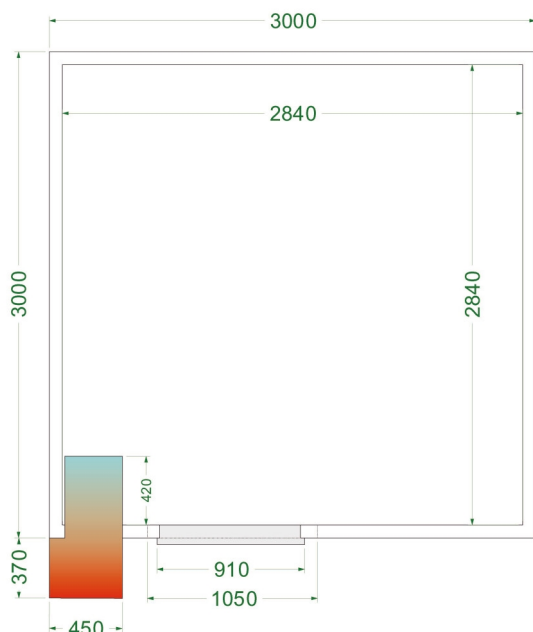

CRPF3030WD

Cold Room

Product Features

- 850 mm wide door
- Plug-In - ready after assembly
- Easy access to products
- Easy assembly
- Interlocking connection system
- 80 mm panel insulation
- Anti-slip floor in SS304 stainless steel
- Door position is fixed
- Shelves available as accessory
- Ramp available as accessory for easy access

Cold room with 850 mm wide door

Cold rooms are perfect as plug-in with quick and easy assemble. The cooling unit comes completely pre-mounted in a panel and does not require extra expert knowledge. This model has a 850 mm wide door for easy access.

The cold room can be used in both restaurants, delis, cafes etc. They are a great way to create optimal and efficient cooling space at a very affordable price. Cold rooms are a perfect and easy accessible way to store foods, dairy products and beverages.

The many different cold room sizes give a good fit in most conditions. Cold rooms are available as both cooler and freezer models. Shelves are optional. A ramp is also available as an option to provide easy access with lightweight trolleys and bakery racks (the cold room is not suitable for pallet jacks/pallet trucks).

Our range of cold rooms have a low energy consumption due to the effective polyurethane insulation in the panels combined with an energy efficient cooling system.

Not suitable for outdoor use.

Measures and Content

Insulation Density	kg/m ³	42
Wall Thickness	mm	80
Internal Volume	m ³	16.45
Temperature Range	°C	0 to +8
Climate Class		5
Gross / Net Weight	kg	840 / 810
Gross / Net Volume	l	

Design and Material

Door No & Type	1 hinged solid door	
Max Load on Floor	kg/m ²	1500
Exterior Finish	White	
Interior Finish	White	
Interior Light	LED	
Lock	Yes	

Cooling and Functions

Type of Controller	Electronic	
Type of Cooling	Ventilated	
Type of Defrost	Automatic, hot gas	
Refrigerant	R290	
Refrigerant Charge	g	200
Thermometer	Yes	

Power and Consumption


Energy Consumption	kWh/24h	25.92
Annual Energy Cons.	kWh/year	9461
Input Power	W	960
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	60

Dimensions

Internal Dimension (WxDxH)	mm	2840 x 2840 x 2040
External Dimension (WxDxH)	mm	3000 x 3000 x 2200
Packed Dimension (WxDxH)	mm	1900 x 3100 x 1200 mm
40ft Container Load	pcs	7



Strong handle



Shelf as accessory