




ECO-FRIENDLY
REFRIGERANT R290

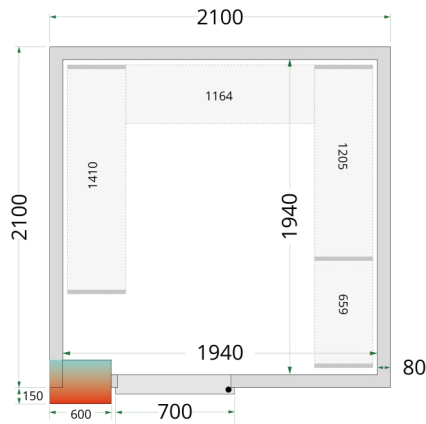

CRPF2121

Cold Room

Product Features

- Plug-In - ready after assembly
- Many customisation possibilities
- Easy access to products
- Easy assembly
- Anti-slip floor in SS304 stainless steel
- 80 mm panel insulation
- Shelves available as accessory
- Ramp available as accessory for easy access

Easy, economic and effective storage in cold rooms

Cold rooms are perfect as plug-in with quick and easy assemble. The cooling unit comes completely pre-mounted in a panel and does not require extra expert knowledge. The interchangeable modular panels even allow varies positioning of both the panel with the cooling unit and the panel with the door. The cold room can be used in both restaurants, delis, cafes etc. They are a great way to create optimal and efficient cooling space at a very affordable price. Cold rooms are a perfect and easy accessible way to store foods, dairy products and beverages. The many different cold room sizes give a good fit in most conditions. Cold rooms are available as both cooler and freezer models. Shelves are optional. A ramp is also available as an option to provide easy access with lightweight trolleys and bakery racks (the cold room is not suitable for pallet jacks/pallet trucks). Our range of cold rooms have a low energy consumption due to the effective polyurethane insulation in the panels combined with an energy efficient cooling system. Not suitable for outdoor use.

Measures and Content

Internal Volume	m ³	7.68
Wall Thickness	mm	80
Insulation Density	kg/m ³	42
Temperature Range	°C	0 to +8
Climate Class		5
Gross / Net Weight	kg	488 / 458
Gross / Net Volume	l	

Design and Material

Door No & Type	1 hinged solid door W:700 H:1845	
Max Load on Floor	kg/m ²	1500
Exterior Finish	White	
Interior Finish	White	
Interior Light	LED	
Lock	Yes	

Cooling and Functions

Type of Controller	Electronic	
Type of Cooling	Ventilated	
Type of Defrost	Automatic, hot gas	
Refrigerant	R290	
Refrigerant Charge	g	150
Thermometer	Yes	

Power and Consumption

Energy Consumption	kWh/24h	21.12
Annual Energy Cons.	kWh/year	7709
Power	1	
Max Ambient	40°C at 40% RH	
Input Power	W	905
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	60

Dimensions

Internal Dimension (WxDxH)	mm	1940 x 1940 x 2040
External Dimension (WxDxH)	mm	2100 x 2100 x 2200
Packed Dimension (WxDxH)	mm	2200 x 1600 x 2400
40ft Container Load	pcs	12



Strong handle



Shelf as accessory